


# Genesis

- Precision Performance
- Maximum Reliability
- Extraordinary Value



**Leaders in compression molding and laminating presses for over half a century**

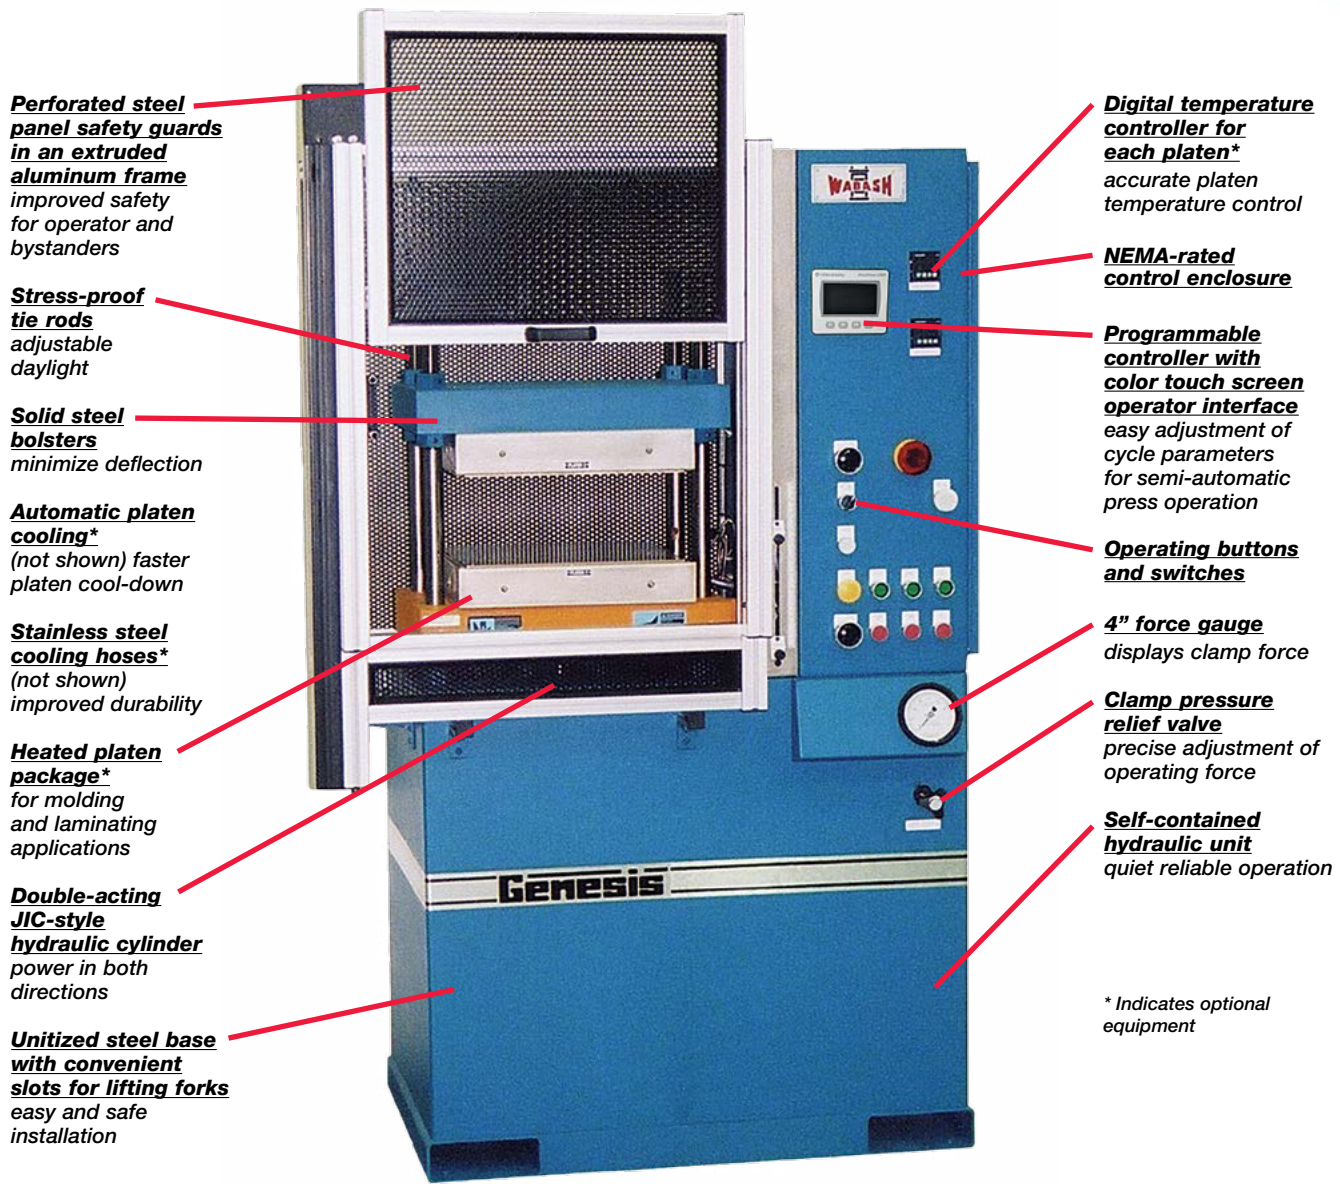

**Perforated steel panel safety guards in an extruded aluminum frame**  
improved safety for operator and bystanders

**Stress-proof tie rods**  
adjustable daylight

**Solid steel bolsters**  
minimize deflection

**Automatic platen cooling\***  
(not shown) faster platen cool-down

**Stainless steel cooling hoses\***  
(not shown) improved durability

**Heated platen package\***  
for molding and laminating applications

**Double-acting JIC-style hydraulic cylinder**  
power in both directions

**Unitized steel base with convenient slots for lifting forks**  
easy and safe installation

**Digital temperature controller for each platen\***  
accurate platen temperature control

**NEMA-rated control enclosure**

**Programmable controller with color touch screen operator interface**  
easy adjustment of cycle parameters for semi-automatic press operation

**Operating buttons and switches**

**4" force gauge**  
displays clamp force

**Clamp pressure relief valve**  
precise adjustment of operating force

**Self-contained hydraulic unit**  
quiet reliable operation

\* Indicates optional equipment

*Hydraulic presses available in 15 to 150 ton models with single or multiple openings.*

# Genesis standard features you want and options your applications may require

Genesis Series presses are state-of-the-art hydraulic presses for compression molding of rubber, plastics and composites; and for laminating and bonding or pressure applications where positive ram control is needed. The Genesis Series reflects more than a half a century of Wabash leadership in hydraulic press design and construction. It is rugged enough for round-the-clock performance on the production floor, but works equally well as a precision laboratory press.

Genesis presses are available in 15 through 150 ton capacities. The hydraulic system produces faster closing and opening speeds, making it ideal for use with many of today's advanced molding compounds. Optional heated platens are available for 500°F, 650°F, 800°F, 1200°F and 1800°F operating temperatures, which are required for many composite, ceramic and other molding applications, including superplastic molding of titanium.

## Standard Features:

- Adjustable clamp force: 15 to 150 tons
- Platen size: 12" x 12" to 30" x 30"
- Programmable controller with access module
- Automatic transfer from closing to pressing speed
- Closing speed 70-90 IPM
- Pressing speed 5 IPM
- OSHA approved operating system
- Pressure adjustment valve
- Integral hydraulic system with high-efficiency TEFC motor, reservoir, gauge & water-cooled heat exchanger
- Electrical supply: 460/3/60 (other voltages available)

See front page photo for additional standard design and construction features.

## Optional Features:

- Larger platen sizes
- Special control systems
- Heated platens (to 500°F, 650°F, 800°F, 1200°F or 1800°F) with cartridge heaters
- Digital PID temperature controllers
- Low pressure system
- Water cooled platens
- Multiple daylights (consult Wabash for information on special requirements your application may demand)
- Pressing speed control
- Automatic bump "breathe" sequence
- CE certification available

## Control system options to improve your process...



**PanelView C400**  
Standard operator interface used for easy set up of press cycle.



**Platen Temperature Controllers**  
Standard 1/16th DIN digital temperature controllers.



**MiniViewpoint with PanelView C600 Operator Interface**  
Mid-level control system for proportional control pressure and for integral temperature control.


# Specifications for Wabash Genesis Series Hydraulic Presses



Unheated Models	Heated Platen Models	Clamp Force (US tons)	Clamp Cylinder Bore (in)	Clamp Stroke (in)	Platen Size (in)	Tie Rod Diameter (in)	Dimensions (in)					Current Draw @ 460/3/60 (Amps)		Approx. Weight (lbs)	
							A	B	C*		D	E	Unheated		Heated Platens
									Std.	Heated					
G15-12	G15H-12	15	5	6	12 x 12	1.25	42	40	10-18	6-12	72	42	4	14	1,750
G15-15	G15H-15				15 x 15									18	1,850
G30-12	G30H-12	30	5	6	12 x 12	1.25	42	40	10-18	6-12	72	42	4	14	1,750
G30-15	G30H-15				15 x 15									18	1,850
G30-18	G30H-18				18 x 18									25	2,500
G50-15	G50H-15	50	7	8	15 x 15	2.0	50	46	12-22	8-16	77	42	6	19	3,500
G50-18	G50H-18				18 x 18									27	3,700
G50-24	G50H-24				24 x 24		36	5,500							
G75-15	G75H-15	75	8	8	15 x 15	2.0	52	52	12-22	8-16	87	42	10	25	3,800
G75-18	G75H-18				18 x 18		52	52						35	5,500
G75-24	G75H-24				24 x 24		57	57						40	8,000
G100-18	G100H-18	100	10	12	18 x 18	3.0	54	53	16-28	12-22	83	42	12	32	6,500
G100-24	G100H-24				24 x 24		60	53						42	7,000
G150-30	G150H-30	150	12	12	30 x 30	3.0	66	60	16-28	12-22	86	43	12	57	10,000
<b>ASTM SAMPLE PREPARATION MODELS</b>															
N/A	G30H-ASTM	30	5	6	12 x 12	1.25	43	40	N/A	6-12	81	42	N/A	13	1,850
	G302H-ASTM				12 x 12						93			23	2,150
N/A	G50H-RASTM	50	7	8	19 x 19	2	53	59	N/A	8-16	85	43	N/A	25	3,650
	G502H-RASTM				19 x 19					2@4	97			40	4,000
<b>ELECTRIC PRESS MODELS</b>															
N/A	GE30H-12	30	N/A	6	12 x 12	1.25	44	56	N/A	6-12	80	44	N/A	15	4,000
	GE30H-15				15 x 15									15	4,000
	GE30H-18				18 x 18									30	4,000

\* Platen cooling may reduce daylight by 1 to 2 inches. Consult factory for specific requirements.

All new Wabash presses are manufactured in compliance with current regulations and are furnished with safety guards as standard equipment. Guards may have been removed in some photographs for clarity. Wabash strongly recommends use of guards and personal protection equipment when operating any press. As a result of continuous improvement, specifications are subject to change without notice. Consult factory for specific data and pricing.

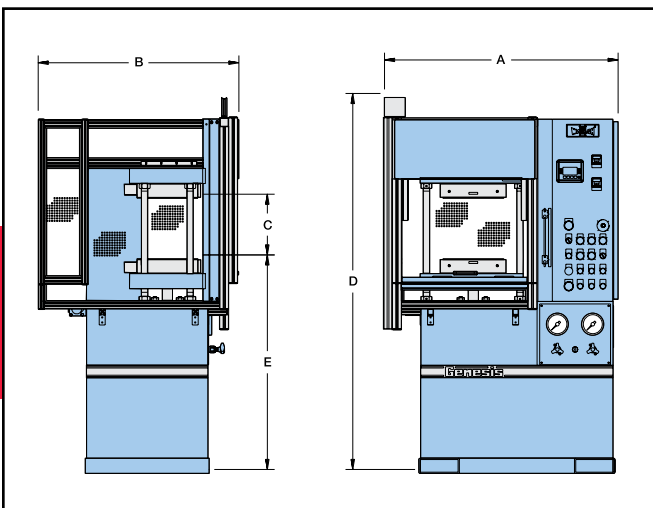

### Reliable Control Systems

NEMA-rated control cabinet designed for easy access. All electrical panels manufactured by Wabash MPI in our UL-approved electrical shop. (UL listing on panels optional.)

### Energy-efficient Hydraulic System

Integral hydraulic system features a dual pump assembly coupled with a high-efficiency TEFC motor sized for the press. Components are easily accessible for quick maintenance.





**Three-Daylight  
30 Ton Press**

*Features 12" x 12" fully guided heated platens, perimeter light curtain, casters, automatic low pressure, and pressing speed control. The press is suitable for use in a class 10,000 clean room.*



**Rubber ASTM  
Test Sample  
Molding Press**

*Genesis models available for preparation of rubber test slabs in accordance with ASTM D3182. Models for rubber test samples (ASTM D3182) also available.*

**Customized Genesis Presses**

While standard Wabash Genesis Presses handle a broad range of applications and can be upgraded with available options, your unique requirements may call for a "customized" press. Shown on this page are a number of such machines which have provided solutions for our customers' problems. Consult your Wabash representative or our office for more information about "customization" for your particular needs.



**Plastic ASTM  
Test Sample  
Molding Press**

*Genesis model G30H-ASTM is designed to produce polyethylene test samples in accordance with ASTM D4703, Procedure C. Models for rubber test samples (ASTM D3182) also available.*



**Wabash MPI**

1569 Morris Street, P.O. Box 298  
Wabash, Indiana 46992-0298 U.S.A.  
Phone 260-563-1184 • FAX 260-563-1396  
E-mail: wabashmpi@acscorporate.com  
Internet: www.wabashmpi.com  
**ISO 9001:2015 Certified**



*All new Wabash presses are manufactured in compliance with current regulations and are furnished with safety guards as standard equipment. Guards may have been removed in some photographs for clarity. Wabash strongly recommends use of guards and personal protection equipment when operating any press. As a result of continuous improvement, specifications are subject to change without notice. Consult factory for specific data and pricing.*